


Technical Specifications Part #: DMEZI-COMPAIR	
TRANSMITTER	
Frequency	2.4GHz-2.4835GHz
Channel	3 Selectable channels
Video Input Signal	Video-1Vp-p(NTSC/PAL) Audio-1Vp-p(NTSC/PAL)
Video Input Impedance	Video-75ohms Audio-600ohms (NTSC)/10Kohms(PAL)
AV Connections	Ezi-Watch Camera Plug or A/V jack-RCA to RCA line jacks
Antenna	Dipole Antenna (Detachable: optional antennas available)
Operating Voltage	DV 9V-12V/500mA power adaptor
Temp Limit	Not to exceed 120°F
Weight	9.4oz (266.5g)
Warranty	1 Year

Note: Each Transmitter may only transmit signal from one camera, however you may receive that signal on multiple receivers



Front: For additional video features other than Ezi-Watch

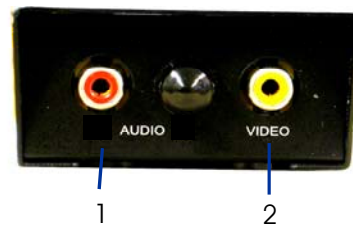


- Transmitter (TX)**
1. External audio input
 2. External video input

- Receiver (RX)**
1. External audio output
 2. External video output

RECEIVER	
Frequency	2.4GHz-2.4835GHz
Channel	3 Selectable channels
AV Connections	Ezi-Watch Camera Plug or A/V jack-RCA to RCA line jacks
Antenna	Dipole Antenna (Detachable: optional antennas available)
Operating Voltage	DV 9V-12V/300mA power adaptor
Weight	9.4oz (266.5g)
Warranty	1 Year

Rear:

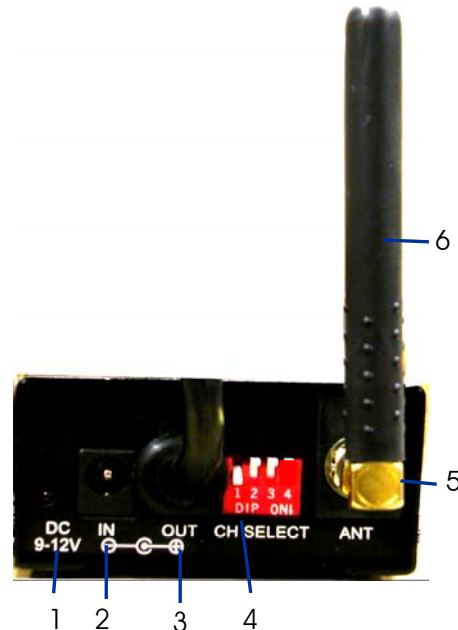


- Transmitter (TX)**
1. Power on indicator LED
 2. DC power IN (500mA)
 3. Power out to camera, Video signal in from camera
 4. AV channel select – toggle down to select channel, set TX and RX to same channel
 5. Antenna Input
 6. Antenna

- Receiver (RX)**
1. Power on indicator LED
 2. DC power IN (300mA)
 3. Power in from monitor, Video signal out to monitor
 4. AV channel select – toggle down to select channel, set TX and RX to same channel
 5. Antenna Input
 6. Antenna

When selecting channels on the Ezi-Com Transmitter or Receiver, ALL toggles, other than the desired channel, must be in the UP POSITION!

Note: Each Transmitter may only transmit signal from one camera, however you may receive that signal on multiple receivers

Technical Specifications Part #: DMEZI-COMWPTX	
TRANSMITTER	
Frequency	2.4GHz-2.4835GHz
Channel	3 Selectable channels
AV Connections	Ezi-Watch Camera Plug
Antenna	Dipole Antenna (Detachable: optional antennas available)
Operating Voltage	DV 9V-12V/500mA power adaptor
Temp Limit	Not to exceed 120°F
Weight	13.6 oz
Warranty	1 Year

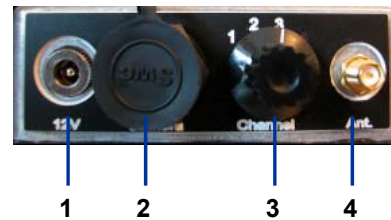


- 1. Power Input
- 2. Ezi-Watch Camera Input
- 3. Channel Select (1-3)
- 4. Antenna Input

Part #:DMEZI-EZICOM	
Frequency	2.4GHz-2.4835GHz
Channel	3 Selectable channels
AV Connections	Ezi-Watch Camera Plug or A/V jack-RCA to RCA line jacks
Antenna	Dipole Antenna (Detachable: optional antennas available)
Operating Voltage	DV 9V-12V/300mA power adaptor
Weight	9.8 oz
Warranty	1 Year



- 1. The Ezi-Com Ezi-Switch Receiver includes the added versatility of an easy to use channel selection dial on the top of the unit.
- 2. Easy Switch Receiver can be used with either the standard Ezi-Com Transmitter, or a Water Proof Transmitter.

Front: For additional video features other than Ezi-Watch

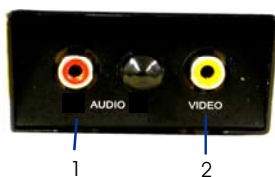

- 1. External audio input
- 2. External video input