



Technical Specifications	
Part #: DMEZI-6,7 or 8M	
Screen Size	6", 7" or 8" diagonal measurement
Operating Temp	-5°F~140°F (-20°C~60°C)
Storage Temp	-10°F~176°F (-23°C~80°C)
Display Method	TFT Active Matrix System
Resolution (HxV)	960(H)x234(V)
Backlight	Cold Cathode Filament Tube
Viewing Angle	L/R: 80° Top: 30° Down: 10°
Weight	11lb 10oz (737g)
Warranty	1 Year

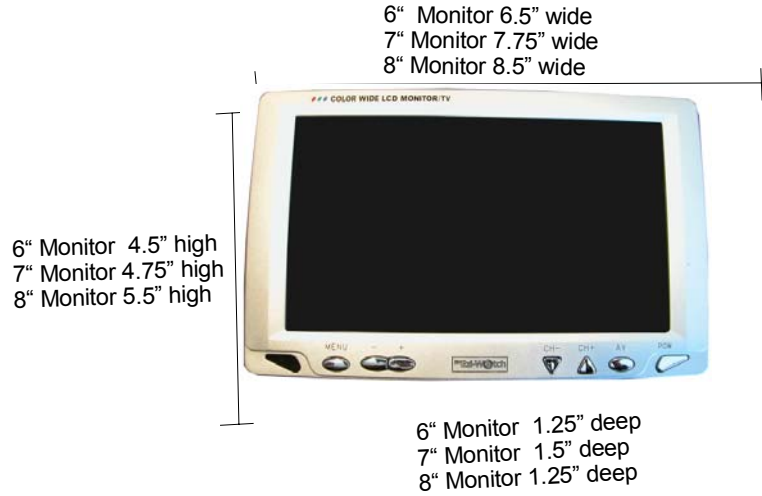

- Features the latest in LCD technology; TFT or "Thin Film Transistor" allows for a larger degree of view from a greater angle.
- Brightness control that allows compensation for use in different lighting environments.
- The LCD monitors Color control allows adjustment of color to users preference.
- On/Off Switch
- All monitors have up/down (roof mount) and left/right (mirror image) capabilities.
- All monitors come with a handy, credit card sized remote control



1. Power: On/Off/Standby Selection
2. Mute
3. AV/TV: to switch between TV and Video
4. Number buttons for TV tuner functions
5. CH+: to select the program and the setting object in the menu
6. Menu: Active OSD menu, press this key and adjust with 5 & 6 buttons.
7. -: Volume or used to adjust function settings.
8. +: Volume or used to adjust function settings.
9. Ch-: to select the program and the setting object in menu.
10. Wide: Select the display a
11. -/--: unit/decimal/percentile



1. Camera (1) input to Monitor, Audio Enabled w/ ¼ twist watertight connector
2. Power in via 12v or A/C adaptor
3. Camera (2) input to Monitor w/ ¼ twist watertight connector
4. In-line surge suppressor and line conditioner
5. Cable from Monitor to AV & Power Inputs